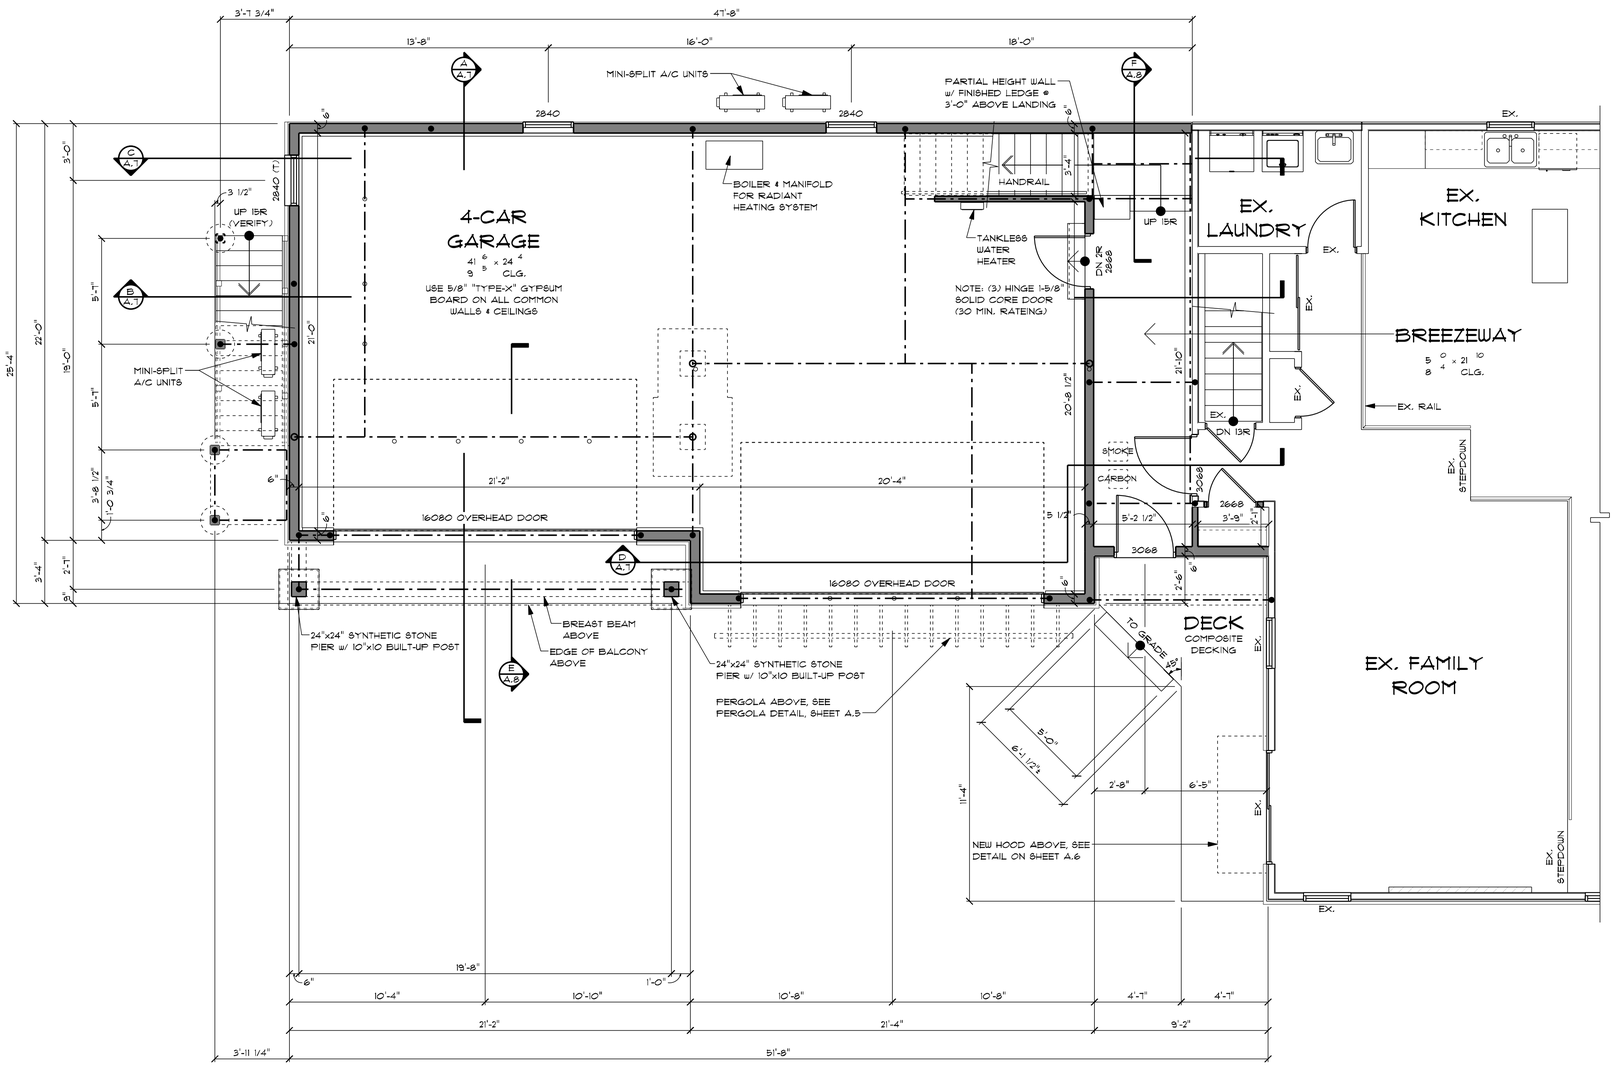


FIRST FLOOR PLAN
SCALE: 1/4" = 1'-0"

FLOOR PLAN NOTES:

1. REFER TO GENERAL NOTES AND GENERAL CODE REQUIREMENTS ON SHEET G0.1.
2. ALL NEW WALLS ARE DIMENSIONED STUD-TO-STUD.
3. ALL INTERIOR WALLS ARE 3-1/2"; EXTERIOR WALLS ARE 6" (6"STUD & SHEATHING) UNLESS OTHERWISE NOTED.
4. ALL ANGLED WALLS ARE 45° UNLESS OTHERWISE NOTED. BOTH SIDES OF THE SQUARE OF THE ANGLE ARE EQUAL EVEN IF ONLY ONE SIDE IS DIMENSIONED.
5. ALL OPENINGS SHALL HAVE A MINIMUM LINTEL OF (2)2x8's w/ 1/2" PLYWOOD SPACER. APPLY GLUE TO THE FULL MATING SURFACE OF BOTH 2x8's & NAIL TOGETHER PER THE FASTENING SCHEDULE ON SHEET G0.1.
6. ALL POSTS SHALL BE A MINIMUM OF (2)2x's w/ GLUE APPLIED ON THE FULL MATING SURFACE & NAILED PER THE FASTENING SHCEDULE ON SHEET G0.1.
7. FLOOR JOISTS SHALL BE CROWNED BEFORE PLACEMENT & SHALL BE DOUBLED UNDER ALL PARALLEL WALLS.
8. REFER TO THE WINDOW NOTES ON THIS SHEET.
9. SMOKE & CARBON MONOXIDE DETECTORS SHALL BE HARDWIRED & INTERCONNECTED w/ BATTERY BACK-UP.
10. CONTRACTOR SHALL SHIM ALL EXTERIOR DOOR THRESHOLDS 3/4" VERIFY w/ BUILDER PRIOR TO COMMENCEMENT.
11. THE GARAGE SHALL BE SEPARATED FROM ITS ATTIC AREA BY 5/8" "TYPE-X" DRYWALL APPLIED TO CEILING OF GARAGE. WHERE THE SEPARATION IS A FLOOR-CEILING ASSEMBLY, THE STRUCTURE SUPPORTING THE SEPARATION SHALL ALSO BE PROTECTED BY 5/8" "TYPE-X" DRYWALL.
12. FLITCH BEAMS ARE CONNECTED w/ 1/2" DIAMETER THRU BOLTS @ 16" O.C. 2" FROM TOP & BOTTOM U.N.O. STAGGER TOP & BOTTOM ROWS 4".

STAIR DATA

2ND FLOOR TO 3RD FLOOR
16 RISERS @ 7-9/16" x 10" 1-3/4" +/-
13 TREADS @ 10" + (2) LANDINGS

1ST FLOOR TO 2ND FLOOR
15 RISERS @ 7-1/2" x 9" 4-1/2" +/-
13 TREADS @ 10" + (1) LANDING

GRADE TO BALCONY
16 RISERS @ 7-5/8" x 12" 2"
14 TREADS @ 10" + (1) LANDING

STAIR REQUIREMENTS

1.	MINIMUM TREAD DEPTH:	10"
2.	NOSING PROJECTION:	3/4" - 1-1/4"
3.	MAXIMUM RISER HEIGHT:	7-3/4"
4.	MAXIMUM VARIANCE IN RISER HEIGHT:	3/8"
5.	MINIMUM HEADEROOM HEIGHT AT STAIR ANGLE:	6'-8"
6.	MINIMUM LANDING DEPTH:	36"
7.	MINIMUM/MAXIMUM HANDRAIL HEIGHT:	34"/38"
8.	MINIMUM GAURDRAIL HEIGHT:	
	AT STAIRS:	34"
	AT ALL RAISED FLOOR SURFACES (DECKS, ETC.):	36"
9.	MAXIMUM BALUSTER SPACING (CLEAR OPENING):	4"
10.	MINIMUM STAIR WIDTH EXCLUDING WALL HANDRAIL:	3'-0"
11.	HAND GRIP MAY NOT EXCEED 2-1/4" IN CROSS SECTION DIMENSION. (SEE RCO SECTION 311.7.8.3.)	
12.	HANDRAILS SHALL EXTEND TO THE END OF THE LAST RISER & RETURN TO WALL OR NEWEL POST PER THE RCO SECTION 311.7.8.4	

WINDER STAIRS, SEE RCO SECTION 311.7.5.2.1
SPIRAL STAIRS, SEE RCO SECTION 311.7.10.1

WINDOW NOTES:

1. ALL WINDOW SIZES SHOWN ARE FOR NOMINAL WINDOW SIZES (EX. 3060 IS 3'-0" x 6'-0")
2. WINDOW EGRESS REQUIREMENTS:

MAXIMUM SILL HEIGHT ABOVE THE FLOOR	44"
MINIMUM NET CLEAR OPENING HEIGHT:	24"
MINIMUM NET CLEAR OPENING WIDTH:	20"
MINIMUM NET CLEAR OPENING:	5.7 SQ. FT.

GRADE FLOOR WINDOWS ARE ALLOWED A NET CLEAR OPENING OF 5'-0" SQ. FT.

3. IT IS THE BUILDERS' RESPONSIBILITY TO ENSURE THAT WINDOWS FOR ALL SLEEPING AREAS MEET THE ABOVE MINIMUM REQUIREMENTS.

NOTE: REFER TO SHEET A.1 OR S.1 FOR FLOOR JOIST BLOCKING DETAIL

ALL STRUCTURE SHOWN ON THESE CONSTRUCTION DOCUMENTS SHOULD BE CONSIDERED AS "MINIMUM REQUIREMENTS". THE BUILDER OR CONTRACTOR MAY CHOOSE TO UPSIZE OR ADD MEMBERS FOR EASE OF CONSTRUCTION.

NOTE: FOR ENCLOSED UNDERSIDE OF STAIR STORAGE PROVIDE FIRE-STOPPING AT TOP & BOTTOM OF STAIR STRINGER & COMPLETELY DRYWALL THE UNDERSIDE

NOTE:
THE EXTERIOR WALLS OF THIS STRUCTURE ARE CONTINUOUSLY SHEATHED WITH OSB TO COMPLY WITH THE BRACE WALL REQUIREMENTS USING METHOD CS-WSP. ANY WALL AREAS THAT REQUIRE ALTERNATE BRACING METHODS WILL BE INDICATED AND LABELED WITH SPECIFIC METHOD REQUIRED. REFER TO BRACED WALL PLANS FOR SPECIFIC REQUIREMENTS. ALL HORIZONTAL JOINTS IN THE SHEATHING WILL BE BLOCKED TO ACCOMMODATE FASTENING REQUIREMENTS WHICH ARE 6" o.c. @ EDGES AND 12" o.c. IN THE FIELD. ALL WITH 8d COMMON NAILS. ANY TRUSS HEELS OVER 9-1/4" WILL HAVE THE OSB EXTENDED UP TO THE UNDERSIDE OF THE RAFTER TAIL AND FASTENED IN THE SAME MANNER. TRUSS HEEL SHEATHING MUST SPAN ACROSS THE TOP PLATES AND EXTEND DOWN THE WALL AT LEAST 24".

STRUCTURAL LEGEND

- DIRECTION & SPAN OF STRUCTURAL MEMBERS (SPECIFIC AREA INDICATED
- DIRECTION & SPAN OF STRUCTURAL MEMBERS
- POST w/ PIER
- PIPE COLUMN w/PAD
- BEAM POCKET (4" BEARING)
- BEAM POCKET w/PILASTER (8" BEARING)
- POINT LOAD FROM ABV.
- (2)2x4's (MIN. BEARING)

NOTE:
- BUILDER TO VERIFY THAT ALL STRUCTURAL LOADS TRANSFER TO FOUNDATION.
- ALL BATH & KITCHEN SOFFITS TO BE FIELD DESIGNED BY THE OWNER & BUILDER.
- ALL TRUSSES TO BE DESIGNED & ENGINEERED BY TRUSS MFG'R

NOTE TO CONTRACTOR AND FELLOW SUB-CONTRACTORS:
IT IS VERY DIFFICULT TO CONFIRM EXACT EXISTING, PRE-BUILT ARCHITECTURAL CONDITIONS SUCH AS ROOF PITCHES, TOPOGRAPHIES, ENCLOSED STRUCTURAL MATERIALS, AND EXISTING MECHANICAL AND PLUMBING CONDITIONS. IF DISCREPANCIES OR CONFLICTS BETWEEN NEWLY DESIGNED SPACES AND EXISTING PORTIONS APPEAR, NOTIFY RESIDENTIAL DESIGNED SOLUTIONS IMMEDIATELY AND BEFORE CONTINUING CONSTRUCTION. CONTINUING COULD LEAD TO ADDITIONAL AND POTENTIALLY EXPENSIVE ACCUMULATIVE CIRCUMSTANCES OCCURRING.

RESIDENTIAL Designed SOLUTIONS
Inspired Ideas. Proven Plans.
7844 FLINT ROAD
COLUMBUS, OHIO 43235
614 430-0027
FAX 430-8071
www.rdshomedesign.com

MEMBER BIA THE Builders Remodelors Council
MEMBER AIBD
NARI MEMBER
N·C·M·D·C

DATE	BY	REVISION

ANY DISCREPANCIES, ERRORS AND/OR OMISSION IN THE NOTES, DIMENSIONS AND OR DRAWINGS CONTAINED ON THESE DOCUMENTS SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGNER PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. PROCEEDING WITH CONSTRUCTION CONSTITUTES THE ACCEPTANCE OF THESE DOCUMENTS AND DISCREPANCIES, ERRORS AND/OR OMISSIONS BECOME THE RESPONSIBILITY OF THE BUILDING CONTRACTOR.

E.LAINE
(23027)

LAINE RESIDENCE
7111 PETER HOOVER RD.
NEW ALBANY (FRANKLIN), OHIO 43054

FIRST FLOOR PLAN

COPYRIGHT 2023
THE ARCHITECTURAL WORKS DEPICTED HEREIN ARE THE SOLE PROPERTY OF RESIDENTIAL DESIGNED SOLUTIONS, INC. AND MAY NOT BE CONSTRUCTED OR USED WITHOUT EXPRESS WRITTEN PERMISSION. NO PERMISSION TO MODIFY OR REPRODUCE ANY OF THESE ARCHITECTURAL WORKS, INCLUDING WITHOUT LIMITATION THE CONSTRUCTION OF ANY BUILDING, IS EXPRESSED, OR SHOULD BE IMPLIED FROM DELIVERY OF PRELIMINARY DRAWINGS OR UNBUILT CONSTRUCTION DOCUMENTS. PERMISSION TO CONSTRUCT THE BUILDING DEPICTED IN SEALED CONSTRUCTION DRAWINGS IS EXPRESSLY CONDITIONED ON THE FULL AND TIMELY PAYMENT OF ALL THE FEES OTHERWISE DUE RESIDENTIAL DESIGNED SOLUTIONS, INC. AND IN THE ABSENCE OF ANY WRITTEN AGREEMENT TO THE CONTRARY, IS LIMITED TO A ONE-TIME USE ON THE SITE INDICATED ON THESE PLANS. ANY OTHER REPRODUCTION, REUSE, OR MODIFICATION OF THESE PLANS OR THE ARCHITECTURAL WORKS DEPICTED IS PROHIBITED

DSN	DL	04.20.2023
LAY	JM	08.03.2023
DET	JM	08.16.2023
CHK	DL	08.17.2023
ENGR	JM	08.21.2023

SHEET:
A.2